2025/11/14 16:35 1/3 3. Créer le dépôt



## Cette page n'est pas encore traduite entièrement. Merci de terminer

#### la traduction

(supprimez ce paragraphe une fois la traduction terminée)

# 3. Create the Store

After the sync sites have been set up, there are three approaches to creating and configuring the store that will operated on that site.




- This can be done 'manually' as described in the first method below. This method is suitable if you are creating only a handful of stores.
- If you are creating a larger number of stores, then it is more appropriate to use one
  or both of the two footrunner code methods. As of 2019-10-24 there are two pieces
  of footrunner code that can expedite this process see Creating data files for
  multiple new remote sites. They can *not* be used together for the same store, but
  it may be appropriate to use store\_create\_from\_name for creation of one store, and
  then use sync clone sync site to create subsequent stores.

### 3.01. Manually create store

On mSupply desktop go to Special > Stores > New Store



#### 2. Enter the Store Code and the Store Name

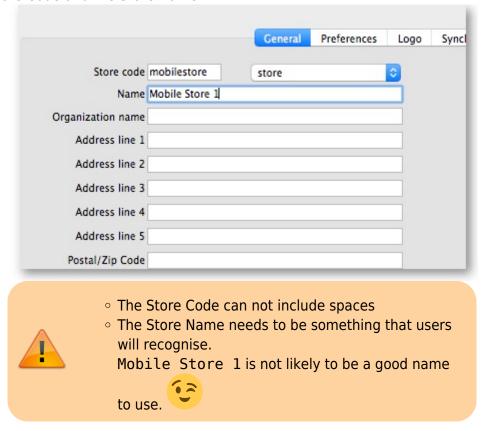

- 3. Configure items visibility for the store
- 4. Configure synchronisation settings
- 5. Configure store visibility to other stores

# 3.02. Create store from existing customer name using store create from name

Use the footrunner code <a href="store\_create\_from\_name">store\_create\_from\_name</a>. This method is only useful if you already have a customer and you want to convert it to a store.

- 1. Run store\_create\_from\_name to clone the original store. You will need to provide:
  - 1. Name **ID** (not name **Code** ) to create the store for (must not be blank or already a store)
  - 2. Store mode for new store (one of store, dispensary or report). Almost always, this should be store
  - 3. Sync ID for site on which the new store will be Active (optional; if left blank, will default to the current site ID)
- 2. Configure items visibility for the store
- 3. Configure synchronisation settings
- 4. Configure store visibility to other stores

## 3.03. Create store by cloning another sync store using sync\_clone\_sync\_site

Use the footrunner code sync clone sync site. Under this method:

- 1. Manually create and appropriately configure a single store.
- 2. Make **sure** the relevant sync sites have been created (above) and then, for **EACH** store:
- 3. Run sync clone sync site to clone the original store. You will need to provide:
  - 1. Sync ID for source sync site
  - 2. Sync ID for clone sync site
  - 3. sync version (v1 for desktop, v3 for mobile)
  - 4. Decision on whether the cloned store will have 'group' store visibility (visible to all other stores with the same supplying store) or not
  - 5. Decision on whether to also clone locations, transactions, stock, requisitions. (almost always **NO**!)
  - 6. new **store** code *and* name for each cloned store
  - 7. new **user** name and password for the each cloned store's default user
- 4. If there are actually existing customers for each of these stores, you will need to merge the existing customer name with the new store
- 5. The store will have the same item visibility configuration as the store that has been cloned. Review, and if necessary, Configure items visibility for the store
- 6. The store will have the correct 'basic' sync settings. Review, and if necessary, Configure synchronisation settings
- 7. The store will have the correct 'basic' store visiblity settings, including, if you have selected it, 'group' store visibility. Review, and if necessary, Configure store visibility to other stores

From:

https://wiki.msupply.foundation/ - mSupply Foundation Documentation

Permanent link:

https://wiki.msupply.foundation/fr:mobile:setup:server\_side:3?rev=1580840638

Last update: 2020/02/04 18:23

